

## G3 HAPTIC SYSTEM

Benefit from a robust and compact actuator form factor while retaining the same core architecture and software integration process that lifted D-BOX ahead of its competitors. This updated version of our renowned G3 system now comes with our ACM G3 FLEX that features a 120/230V switch for flexible power configurations.

PERFORMANCE UNDER MAXIMUM LOAD	250I-3	400I-3
<b>MAXIMUM LIFTING CAPACITY PER ACTUATOR</b>	250 lb / 114 kg	400 lb / 182 kg
<b>HORIZONTAL LOAD</b>	Translation on limited friction surfaces can be done on weights up to 3 times vertical lifting capacity.	
<b>MAXIMUM STROKE</b>	3 inch / 76.2 mm	
<b>MAXIMUM VELOCITY</b>	100 mm/s	
<b>MAXIMUM ACCELERATION</b>	+/- 1 g-force	
<b>FREQUENCY RANGE</b>	0-100 Hz	
<b>OPERATING TEMPERATURE RANGE</b>	0-40°C	
<b>OPERATING HYGROMETRY</b>	10 to 85% (free from condensing)	

Note: It is not recommended to connect your D-BOX system to a GFCI breaker type.

POWER REQUIREMENTS			AVERAGE POWER To be used for electric consumption	PEAK CURRENT To be used for breaker specification
120 V 50/60 HZ	250 lb	1 TO 2 ACTUATORS	240 W	3.75 A
		3 TO 4 ACTUATORS	480 W	7.5 A
	400 lb	1 TO 2 ACTUATORS	320 W	3.75 A
		3 TO 4 ACTUATORS	640 W	7.5 A
230 V 50/60 HZ	250 lb	1 TO 2 ACTUATORS	266 W	3.75 A
		3 TO 4 ACTUATORS	533 W	7.5 A
	400 lb	1 TO 2 ACTUATORS	373 W	3.75 A
		3 TO 4 ACTUATORS	746 W	7.5 A

# D-BOX G3 HAPTIC SYSTEM


1.5"

3"

6"

## SYSTEM OVERVIEW\*


### BRACKET OPTIONS

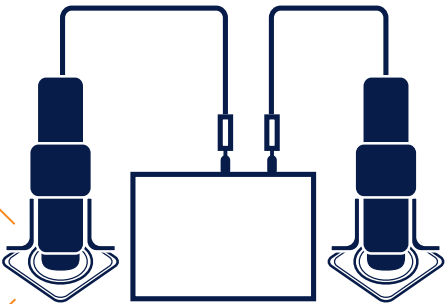

### ENDING OPTIONS




ACM G3 FLEX

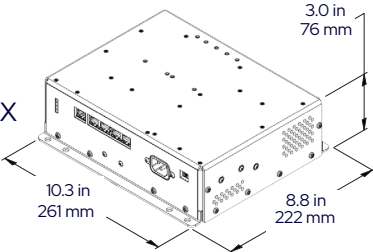


\*Two actuator system

## 3" ACTUATOR FAMILY

250 I-3

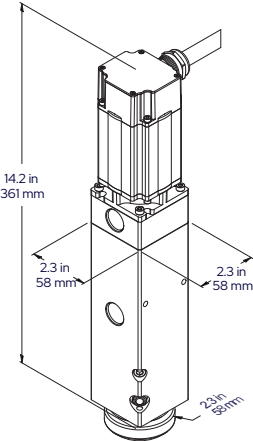

400 I-3

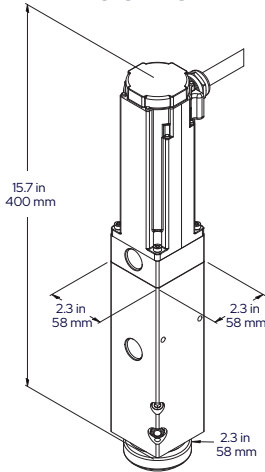

\*HD refers to an actuator designed with a double nut ball screw for higher durability in high strain environment and extended periods of time.



© 2024 D-BOX Technologies. All Rights Reserved. Specifications are subject to change without notice. D-BOX is a registered trademark. All other brand or product names are trademarks of their respective owners. Product photos and pictures are for illustration purposes only and may differ from the real product's appearance.



246-914-0002-EN2 - November 2024